

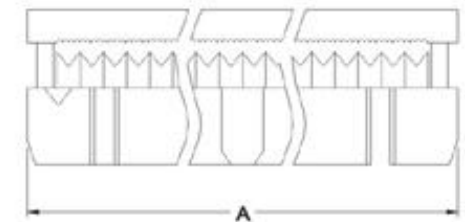


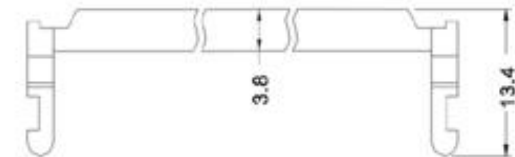

110 series

I.D.C. SOCKET 2.54mm(0.100")

Position	A	B	Position	A	B
8	14.73	7.62	30	42.67	35.56
10	17.27	10.16	34	47.75	40.64
14	22.35	15.24	40	55.37	48.26
16	24.89	17.78	50	68.07	60.96
20	29.97	22.86	60	80.77	73.66
26	37.59	30.48	64	85.85	78.74

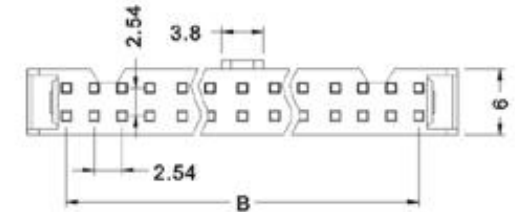

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

110 - 34 T A K

SERIES NO — 1
 NO.OF PINS: — 2 3 4 5
 8.10.14.16.20.
 26.30.34.40.
 50.60.64

CONTACT PLATED:
 G-ALL GOLD PLATED
 T-TIN PLATED ON TERMINAL &
 GOLD PLATED ON CONTACT

COLOR:K-BLACK
 G-GRAY

OPTION ON STRAIN RELIEF:
 A-WITH STRAIN RELIEF
 B-W/O STRAIN RELIEF